



# Technical Specifications

HEVC Advance™



## MOBOTIX MOVE NVR-64

### MOBOTIX MOVE Plug & Play NVR Series

The MOBOTIX MOVE NVR **Plug & Play** series has been exclusively designed to support the MOBOTIX MOVE IP Camera series with powerful recording by deep integration protocols out-of-the-box. The integrated 24-port PoE switch allows direct connection of IP cameras without extra power supply. It is equipped with iSCSI communication interfaces for seamless adaptation to the requirements of the installation. The web management interface allows monitoring and configuring PoE power consumption, network connection quality, and controlling the PoE power support of ONVIF S-conformant 3rd-party cameras. This provides extensive flexibility in mixed camera environments.

- 2MP Full HD up to 4K (12MP) IP camera support
- Support of MOBOTIXMOVE, IoT cameras and 3rd-party cameras via ONVIF S protocol
- H.264/H.265 recording and playback
- Dual streaming, up to 64 channels simultaneous real-time live, record and playback
- Integrated PoE+ switch with 24 (802.3af/at) ports for Plug & Play MOVE camera integration
- Can handle additional 40 Plug & Play MOVE cameras via external switch
- Full HD local dual display/monitor output (HDMI/DisplayPort)
- 8 x HDD-Cartridge (HOT-swappable, RAID 0/1/5/10)
- Failover server support/Real time backup with alternative firmware

## Technical Specifications

### MOBOTIX MOVE NVR-64

---

- iOS & Android app support provides convenient mobile access to live and recorded video on the NVR
  - Alarm I/O connectors (4 relay outputs, 4 signal inputs)
-

# Technical Specifications

Type	Mx-S-NVR1A-64-POE
<b>System</b>	
Operating System	Embedded Linux
CPU	Intel Skylake i5-6500
RAM	2 x 4 GB, DDR4
Boot Drive	32 GB 2.5" SSD for Linux
Graphics	Intel HD Graphics 530
DISPLAY PORT Output	Up to 4096x2304 @60Hz
HDMI Output	Up to 4096x2160 @24Hz or 2560x1600 @60Hz (HDMI 1.4)
Audio Input	3.5 mm TRS phone jack
Audio Output	3.5 mm TRS phone jack
USB Ports	USB 2.0 x 2 ; USB 3.0 x 3 (1 front, 2 rear)
<b>Recording/Playback</b>	
IPCAM Throughput	Average: 480 Mbps Peak: 540 Mbps
GPU Hardware Decoding	64 CH real-time display, up to 1920 fps@D1 decoding
Compression Format	H.264/H.265
<b>Storage &amp; I/O</b>	
Build-in SATA Interface	1 x 2.5" SATA 8 x 3.5" SATA (Hot-swappable)
Build-in RAID	RAID 0/1/5/10
eSATA	1 x eSATA
Digital Input	Input level 24V (H: $V_{in} \geq 2.4V$ , L: $V_{in} \leq 1.6V$ ) 4 x Terminal Block
Digital Output	24V, 1A, Relay NC 4 x Terminal Block

## Technical Specifications

### MOBOTIX MOVE NVR-64

---

**Type** **Mx-S-NVR1A-64-POE**

#### Network

WAN Uplink 2 x RJ-45, 10/100/1000 Mbps

LAN Uplink 2 x RJ-45, 10/100/1000 Mbps

LAN ports with PoE 24 x RJ-45, 10/100Mbps

PoE Level 24 x IEEE 802.3 af/at

PoE & switch management Linux SDK

Supported protocols TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, ARP, DNS, DDNS, HTTPS, ONVIF

Maximum Remote Users **Playback:** 4  
**Live unicast & multicast:** Unlimited

IP IPv4/IPv6

Security User access log, 802.1x authentication, Encryption

#### Functions/Performance

Language support English, French, German, Russian, Turkish, Arabic, Traditional Chinese, Japanese

Browser Support Internet Explorer, Safari, Chrome, Firefox

Viewer Software Webviewer

Camera Setup **Register:** Auto, Manual  
**Setup Items:** IP address, PTZ control, Image setup, Video Format, Motion Detection, Audio detection, Schedule, Video Analytics, Fisheye, Mask, Text Overlay, Alarm, IR exposure, Reboot, Default

PTZ Control Local, Via GUI, Webviewer

App Support **Operating Systems:** iOS/Android  
**Protocols:** TP, RTSP, HTTP, WebAPI  
**Control:** Control Live (6 channel)/Playback (6 channel)

Redundancy **Failover:** N + M (include fallback) supported with alternative firmware

System Control Mouse, Web

System Log max 20.000 entries

---

<b>Type</b>	<b>Mx-S-NVR1A-64-POE</b>
Recording	<b>Resolution:</b> CIF ~ 12 MP <b>Compression:</b> H.264/H.265 <b>Mode:</b> Schedule (Continuous/Event), Event (Pre/Post) <b>Event Trigger:</b> Camera event (MD, Video analytics, Alarm In, Network Failure detection, Periodical Event, Manual Trigger) <b>Event Action:</b> E-mail, PTZ preset, Event full screen, Push notification, Alarm Out
Search & Playback	<b>Playback Bandwidth:</b> 64Mbps (64 channels simultaneously) <b>Performance:</b> Local 1, Remote 4 <b>Mode:</b> Date & Time (Calendar)/Event log list <b>Simultaneous Playback:</b> Maximum 64 channels (Local monitor, Remote, CMS) <b>Resolution:</b> CIF ~ 12 MP <b>Fish-eye Dewarping:</b> Yes <b>Playback Control:</b> Fast/Slow Forward/Backward
Backup	<b>Export format:</b> MP4,AVI, MKV, MOV, Raw <b>Function:</b> Multi-channel (Up to 64 channel) play, customized OSD display
Video	<b>Channels:</b> total up to 64 (Network/IP), max. 24 via integrated PoE ports <b>Local Display:</b> 1x HDMI, 1x display port dual monitor <b>Multi-Screen Display:</b> [Local monitor] 1/64, [Web] 1/64 <b>Performance (Local Display):</b> 12 MP (30fps), 8.3 MP (120fps), 1080p (480fps), 720P (960fps), D1 (1560fps)
Audio	<b>Input:</b> 64 channels via camera network stream <b>Audio Communication:</b> 2-way with camera
<b>Indicator/Display</b>	
Front Indicator	<b>LED Status Indicator (38EA):</b> 8 x HDD action, 1 x Power, 2 x WAN status, 2 x LAN status, 24 x PoE power status, 1 x PoE power shortage
Display port/HDMI	<b>Both monitors:</b> Live/Playback/Setup <b>Extended Mode:</b> main/sub monitor control
<b>General</b>	
Unit Dimensions (mm)	428 x 435 x 88

## Technical Specifications

### MOBOTIX MOVE NVR-64

---

Type	Mx-S-NVR1A-64-POE
Unit Weight (kg)	7.5
Package Dimensions (mm)	575 x 575 x 175
Package Weight (kg)	9.5
19" Rack Mounting	19" rack mounting kit included
Operating Temperature	0 to 40 °C/32 to 104 °F
Operating Relative Humidity	10 to 90 % non-condensing
System Power Supply	AC 100~240V, ATX 520W (53V/360W for PoE; 12V/160W for HDD/System)
PoE Budget per Port	max. 30 W
Total PoE Budget	360 W
Color/Material	Black/Metal

---

## List of Tested Hard Disks

**NOTE!** To ensure long-term reliable operation, make sure that you are using **server-grade hard disks** from the manufacturers' series listed below.

Brand	Series	Model Number	Capacity
Seagate	Skyhawk	ST1000VX005	1 TB
		ST2000VX008	2 TB
		ST2000VX015	2 TB
		ST3000VX009	3 TB
		ST4000VX007	4 TB
		ST4000VX013	4 TB
		ST6000VX001	6 TB
		ST8000VX004	8TB
	SkyHawk AI	ST8000VE000	8 TB
		ST10000VE001	10 TB
		ST14000VE0008	14 TB
		ST16000VE000	16 TB
		ST18000VE002	18 TB
	Ironwolf	ST12000VN0008	12 TB
	Ironwolf Pro	ST16000NE000	16 TB

## Technical Specifications

### MOBOTIX MOVE NVR-64


---

Brand	Series	Model Number	Capacity
Western Digital	Purple	WD10PURZ	1 TB
		WD20PURZ	2 TB
		WD30PURZ	3 TB
		WD40PURZ	4 TB
		WD60EJRX	6 TB
		WD60PURZ	6 TB
		WD62PURZ	6 TB
		WD82PURZ	8 TB
		WD84PURZ	8 TB
		WD102PURZ	10 TB
		WD121PURZ	12 TB
		WD140PURZ	14 TB
		WD180EJRX	18 TB
		WD180PURZ	18 TB
		Purple pro	WD8001PURP
	WD141PURP		14 TB
	Gold (Ultrastar)	WD102KRYZ	10 TB
		WD121KRYZ	12 TB
		WD141KRYZ	14 TB
		WD161KRYZ	16 TB
		WD181KRYZ	18 TB
		WUH721818ALE6L4	18TB

---




# Front Panel

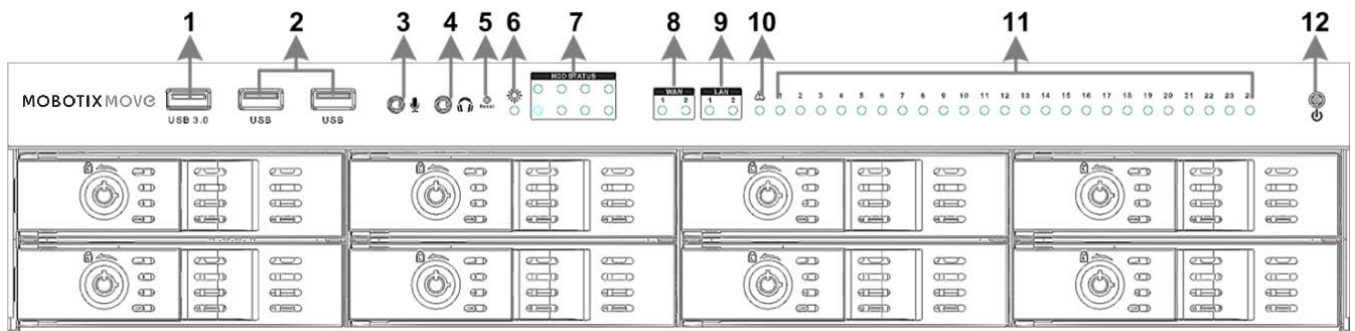

Item	Name	Description
1	USB 3.0 Port x1	USB 3.0 port supports 3.0, 2.0 or 1.0 devices. Data can be transmitted and backed up via external hard drive or USB Thumb drive.
2	USB 2.0 Port x2	USB 2.0 ports allow users to connect external USB devices, such as a USB mouse, a USB keyboard, a USB storage device, etc
3	Mic In	A 3.5 mm phone jack is provided to input/output audio.
4	Audio Out	
5	Reset Button	Press with a proper tool to restore the factory defaults of the NVR system.
6	Power LED	Lights up when the power is on.
7	HDD LED (RAID)	<ul style="list-style-type: none"> <li>▪ <b>Flashing:</b> The HDD is reading/writing data.</li> <li>▪ <b>OFF:</b> The HDD is not running.</li> </ul>
8	WAN LED	<ul style="list-style-type: none"> <li>▪ <b>Orange:</b> Network speed is 1000Mbps.</li> <li>▪ <b>Green:</b> Network speed is 10/100Mbps.</li> </ul>
9	LAN LED	
10	P. Max	Lights up when there are 10 watts left to reach the power budget of PoE switch.
11	Camera LED	Lights up when the camera is powered up and has good network connection. <ul style="list-style-type: none"> <li>▪ Lights up in Green when the power source is from NVR.</li> <li>▪ Lights up in Orange when the camera is powered by external power supply.</li> </ul>
12	Power Button	Press to power on the NVR system. <ul style="list-style-type: none"> <li>▪ Press for 3 seconds to open the power option (power off/cancel/reboot) on screen.</li> <li>▪ Press for 10 seconds to trigger forced shutdown.</li> </ul>


# Rear Panel

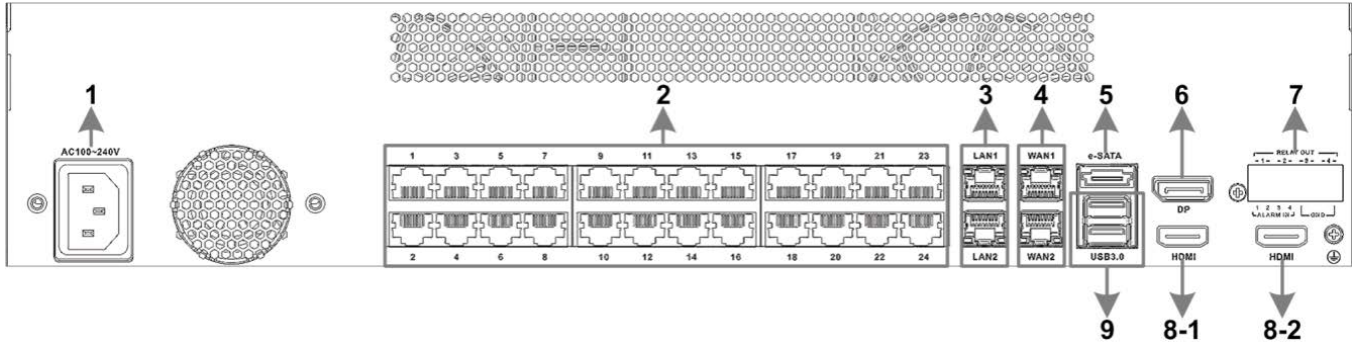

Item	Name	Description
1	Power Jack	Connect the power cord shipped with the NVR to power on the NVR system.
2	PoE Switch	Provides network connectivity and power supply for up to 24 IP cameras.
3	LAN (RJ-45) 10/100/1000 Mbps	The NVR is capable of connecting the Smart PoE Switch via LAN port. <ul style="list-style-type: none"> <li>▪ <b>Green LED:</b> Flashes when data is being transmitted via network.</li> <li>▪ <b>Orange LED:</b> <ul style="list-style-type: none"> <li>— Lights up in green when network speed is 10/100 Mbps.</li> <li>— Lights up in orange when network speed is 1000 Mbps.</li> </ul> </li> </ul>
4	WAN (RJ-45) 10/100/1000 Mbps	This port is for connecting to the Internet (i.e., DSL router). <ul style="list-style-type: none"> <li>▪ <b>Green LED:</b> Flashes when data is being transmitted via network.</li> <li>▪ <b>Orange LED:</b> <ul style="list-style-type: none"> <li>— Lights up in green when network speed is 10/100 Mbps.</li> <li>— Lights up in orange when network speed is 1000 Mbps</li> </ul> </li> </ul>
5	eSATA	This port is for connecting an external SATA device
6	DisplayPort (DP1)	For connecting a monitor using its DisplayPort connector.
7	Alarm I/O Connectors	For connecting other devices to the NVR (see pin definition below).
8-1, 8-2	HDMI 2, HDMI 3	For connecting monitors using their HDMI connectors.
9	2 x USB 3.0 Port	USB 3.0 ports support all 3.0/2.0/1.0 devices. Data can be transmitted and backed up via external hard drives or USB Thumb drives.

## Alarm I/O Connectors

### Pin Definition of Alarm I/O



Pin	Definition	Pin	Definition	Pin	Definition	Pin	Definition
1	Relay Out 1	5	Relay Out 3	9	GND 1	13	Alarm In 4
2		6		10	GND 2	14	Alarm In 3
3	Relay Out 2	7	Relay Out 4	11	GND 3	15	Alarm In 2
4		8		12	GND 4	16	Alarm In 1

# MOBOTIX

BeyondHumanVision

[EN\\_10/21](#)

MOBOTIX AG • Kaiserstrasse • D-67722 Langmeil • Tel.: +49 6302 9816-103 • [sales@mobotix.com](mailto:sales@mobotix.com) • [www.mobotix.com](http://www.mobotix.com)

MOBOTIX is a trademark of MOBOTIX AG registered in the European Union, the U.S.A., and in other countries. Subject to change without notice. MOBOTIX do not assume any liability for technical or editorial errors or omissions contained herein. All rights reserved. © MOBOTIX AG 2021